

MultiViewer Multiply Your Efficiency

Central Monitoring Software

Software Package Incl.

Software CD x 1
USB2.0 License Key x 1
Manual



Specification

Model No.	MV168-R	MV168-W
Compatible DVR	RTOS Embedded DVR	WinXP Embedded DVR
No. of Monitoring DVR	32	128
No. of Display Camera on Screen	256	256
E-map	7. Layers	7. Layers
Alarm E-mail Notification	Yes	Yes
Alarm Log (Picture)	Yes	Yes
Pre/ post Alarm picture	N / A	Yes
Time Synchronization	N / A	Yes
Multi-user, Multi-authority	Yes	Yes
Hidden Camera & DVR	Yes	Yes


Recommended minimum PC Requirement

- Operation System: Win2000, WinXP
- CPU: 2.88GHz (min.)
- USB2.0 port x 1 (min)
- VGA Display: 1,280 x 1,024 pixels
- Free Hard Disk Space: 160GB (min.)
- 5M (downstream) Broadband Bandwidth preferred

Main Menu



Multi-user, Multi-authority

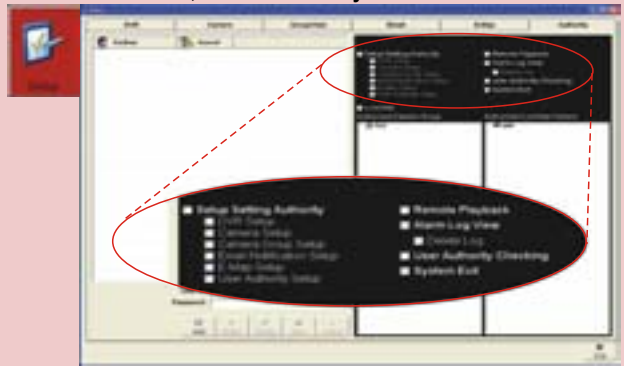

Alarm Log with Picture



Alarm Notification




Live View (GroupView 256-Camera)



Live View (Full-Screen)



Live View (Via E-Map)

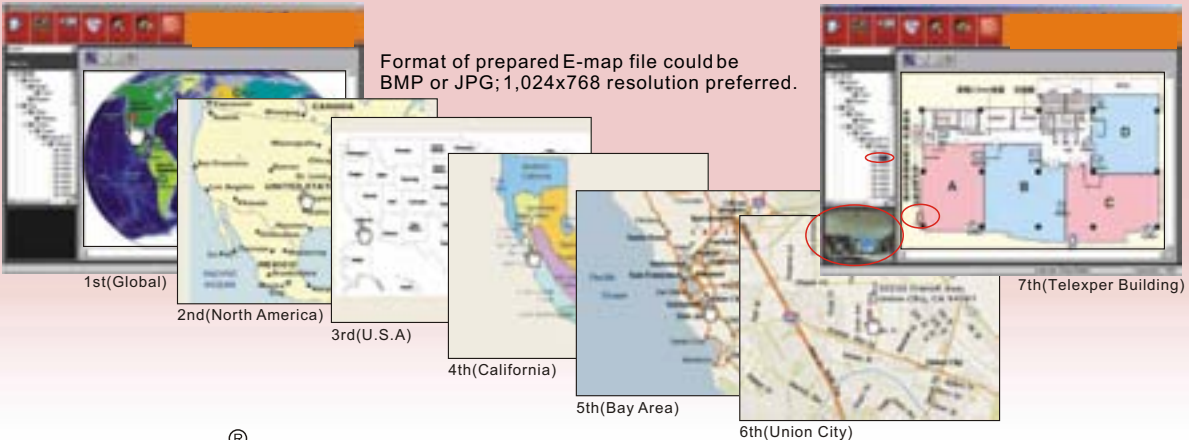

Format of prepared E-map file could be BMP or JPG; 1,024x768 resolution preferred.

1st(Global)

2nd(North America)

3rd(U.S.A)

4th(California)

5th(Bay Area)

6th(Union City)

7th(Telexper Building)